




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : H04B 7/26, H04L 27/36 H03F 1/32</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/10765</p> <p>(43) International Publication Date: 11 May 1994 (11.05.94)</p>
<p>(21) International Application Number: PCT/EP93/02743</p> <p>(22) International Filing Date: 7 October 1993 (07.10.93)</p> <p>(30) Priority data: 9222922.8 2 November 1992 (02.11.92) GB</p> <p>(71) Applicant (for all designated States except US): MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only) : VAN DEN HEUVEL, Anthony, Patrick [GB/GB]; Gunners Woods, Chertsey Road, Windlesham, Surrey GU20 6HZ (GB). VALENTINE, Stephen, Thomas [GB/GB]; 204 Britten Road, Brighton Hill, Basingstoke, Hants RG22 4HR (GB). BOSCOVIC, Dragan [GB/GB]; 48 Meadowland, Chicheam, Basingstoke, Hants RG24 0XL (GB).</p>		<p>(74) Agents: DUNLOP, Hugh, Christopher et al.; Motorola, European Intellectual Property Operations, Jays Close, Viables Industrial Estate, Basingstoke, Hants RG22 4PD (GB).</p> <p>(81) Designated States: AT, AU, BB, BG, BR, CA, CH, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>

(54) Title: POWER AMPLIFIER LINEARIZATION IN A TDMA MOBILE RADIO SYSTEM

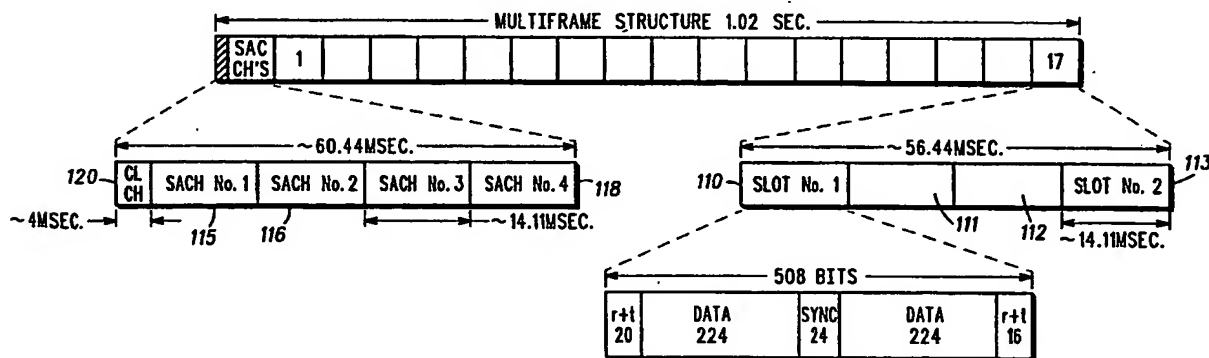

(57) Abstract

This invention relates to a time division multiple access (TDMA) trunked radio system and it relates to a frame structure for communication between fixed, mobile and portable radios in such a system. The radio system comprises: a base station and a plurality of remote radio units for communicating over time slots of a time divided radio channel, the base station having means for transmitting a synchronization signal for defining the timing of the time slots, and each of the remote units having a power amplifier with linearization means, characterized in that the channel comprises predetermined linearization time slots (120) for transmission of training signals, interspersed between other time slots and each remote radio unit comprises means for generating a training signal during a linearization time slot and linearizing its power amplifier during that time slot in advance of and independent of transmission of signals during one of said other time slots.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

533867

Power Amplifier Linearization in a TDMA Mobile Radio System

Field of the Invention

5 This invention relates to a time division multiple access (TDMA) trunked radio system and it relates to a frame structure for communication between fixed, mobile and portable radios in such a system.

10 Background to the Invention

 Currently proposed spectrally efficient radio systems such as the proposed European standard for digital trunked radios require highly linear power amplifiers to minimize the transmission of modulation products or "splatter" on adjacent channels. A technique for achieving the necessary linearity performance in power amplifiers involves the use of a linearization training sequence such as is described in US patent No. 5066923 of Motorola Inc.

15 A problem with this method of linearizing of power amplifiers is that a finite amount of time needs to be allocated for the training sequence to be transmitted. In time division multiple access systems, the allocating of a finite amount of air time for training is a particularly costly overhead which reduces overall system throughput.

20 One method for avoiding the need to allocate excessive air time for training is described in UK patent application No. 9204496.5 of Motorola Limited. In the arrangement described in that patent application, training is achieved off-air by use of a circulator and an antenna switch and a load, in which the training sequence is transmitted into the load by selective operation of the antenna switch.

25 There is a perceived need in the art for a manner of achieving linearization of the power amplifier without the use of substantial additional hardware and with a minimum of air time being allocated for training. Other requirements that need to be addressed are a minimum delay between a requirement to transmit and the achievement of linearity prior to transmission and/or the minimisation of

transmissions while not fully linearized to an acceptably low percentage of all transmissions.

Summary of the Invention

5

According to the present invention, a radio system is provided comprising a base station and a plurality of remote radio units for communicating over time slots of a time divided radio channel, the base station having means for
10 transmitting a synchronization signal for defining the timing of the time slots, and each of the remote units having a power amplifier with linearization means, characterized in that the channel comprises predetermined linearization time slots for transmission of linearization training signals,
15 interspersed between other time slots and each remote radio unit comprises means for generating a linearization training signal during a linearization time slot and linearizing its power amplifier during that time slot in advance of and independent of transmission of signals during one of said
20 other time slots.

Throughout this description the word "channel" is used to refer to a physical radio channel, i.e. a given bandwidth of radio spectrum. The expression "logical channel" is used to refer to a predetermined series of timeslots on a physical
25 channel which together form a communication link.

The predetermined linearization timeslots can be considered to be a logical channel and the term "common linearization channel" or "CLCH" will be used to refer to this logical channel.

30 The invention has the advantage that all users on the system turn to the common linearization channel to train the linear transmitters. It is of no consequence if high power training signals are transmitted on this CLCH, because all units on the system are synchronized to use this CLCH for no
35 other purpose.

Thus, transmitter linear training overhead is not required in every timeslot (traffic or control signalling).

It is preferred that a CLCH is provided on every physical channel.

A problem remains where a unit that wishes to transmit is granted a new physical channel. Unless the CLCH timeslots are provided on a very frequent basis (which would result in a high overhead signalling cost and would be contrary to the aims of the invention), there will be a delay between receiving a command to tune to the new channel and the next CLCH time slot. There is a need to allow such a unit to train its power amplifier without delay, so that it can transmit without delay and without undue splatter onto adjacent channels.

In accordance with a preferred feature of the invention, each of the remote units comprises means for receiving a command on a first channel allowing the unit to transmit on a second channel and means for generating a training signal at the start of transmission on the first selected timeslot on the second channel and no training signal upon transmission on at least predetermined subsequent timeslots on that channel.

Thus, for example, when a base station commands a remote unit or a group of remote units to move to a given physical channel where that physical channel comprises only logical traffic channels, a portion of the first relevant timeslot following the command to go to that channel is dedicated to linearization and the unit that is to transmit (e.g. the unit that requested the channel) generates a linearization training signal during the first portion of the first timeslot.

Preferably all units that receive a command on a first channel causing them to tune to a second channel, for receiving signals on the second channel, automatically generate training signals on the next available linearization time slot on the second channel and linearize their power amplifiers during that time slot. In this manner, all members of a group, including any dispatcher connected to the base station via a landline, are ready to transmit on the new channel.

This arrangement has the advantage of allowing units to train on the new frequency at the first available CLCH on that frequency without setting aside excessive time for

linearization in case they should need to respond to the initiator's transmission.

Whereas the unit that has requested a channel and has been instructed to move to the new channel immediately
5 generates a linearization training sequence at a time that is not set aside for linearization across the system and that unit is liable to splatter over to adjacent channels at that time. The arrangement nevertheless reduces the power and occurrence of such unsynchronized training to a minimum.

10 It is a further preferred feature that all linearisation transmissions shall be at a power level not substantially higher than that to be subsequently used to transmit speech or data on a traffic slot, assuming that the system employs some form of power control to limit splatter generally. This
15 ensures that where incidental splatter does occur, it is as low as possible, and may also mean that under very low power setting conditions, no linearization training may be necessary.

The technique of off air training described in UK
20 patent application no. 9204496.5 may be used during training to still further limit the magnitude of the splatter.

a further preferred feature comprises means associated with the base station for adjusting the timing of transmission of synchronization signals with respect to
25 synchronization signals transmitted by other base stations, e.g. from unrelated systems operating on adjacent frequencies, so as to provide coincidence between linearization time slots between coexisting systems.

A preferred embodiment of the invention will now be
30 described, by way of example only, with reference to the drawings.

Brief Description of the Drawings

35 Fig. 1 is a block diagram of a remote radio unit and a base station in accordance with the invention;

Fig. 2 is a time diagram of the multiframe structure of a control and traffic channel in accordance with the invention;

Fig. 3 is a time diagram of a control channel subslot;
Fig. 4 is a time diagram of the first slot of a logical traffic channel.

5 Detailed Description of the Invention

Fig. 1 illustrates a remote unit 5 and a base station 6 in accordance with the invention. The remote unit 5 comprises a linearizer 10, an up-converter 11, a power
10 amplifier 12, a feedback loop 13, a down-converter 14, a phase detector 15 and a phase adjuster 16. The linearizer and phase adjuster are under the control of a microprocessor 20. The unit also comprises an antenna 21 connected to an antenna switch (or in appropriate circumstances a duplexer)
15 and a receiver 24.

The general operation of the remote unit is as follows. The antenna switch 22 selectively connects the antenna 21 to the transmitter power amplifier 12 or the receiver 24. When in transmit mode, the power amplifier 12 is connected to the
20 antenna 21 and quadrature baseband inputs are input to the linearizer 10 and simultaneously detected by the phase detector 15. After up conversion and amplification, a portion of the amplified signal is fed by feedback loop 13 to down-converter 14. In response to the phase detected by
25 phase detector 15, the microprocessor 20 controls the phase adjuster 16 and the linearizer 10 to adjust the phase and amplitude respectively of the loop formed by elements 10 to 14.

In order to achieve optimum performance, it is necessary
30 to operate the feedback loop at the point of optimum loop phase for stable operation and maximum gain without clipping for maximum efficiency. In order to find these optimum parameters, a training sequence is input to the linearizer
10. The training sequence preferably has a waveform as
35 described in UK patent application No. 9204496.5 and also described in US patent No. 5066923. The exact time of transmission of this sequence is controlled by microprocessor 20.

The elements 10-24 of the remote unit 5 are replicated as elements 10'-24' in the base station 6. In the case of the base station 6, the microprocessor 20' controls the synchronisation and periodically inputs synchronisation sequences into the linearizer 10' to which remote unit 5 will synchronise.

In the case of a remote unit (for example a portable or mobile radio) the microprocessor 20 will cause the switch 22 to switch to receive as a default mode in which the receiver 24 will receive synchronisation sequences from a base station and timing will be deduced from these synchronisation sequences.

Referring to Fig. 2, a preferred multiframe structure is illustrated. The multiframe structure comprises 18 frames in total, each of which is divided into slots. The first frame is labelled SACCH's (slow associated control channels). Each of the other 17 frames comprise four slots 110 to 113, as shown at the right of the figure. Three of the slots 110 to 113 comprise 508 bits each as shown at the bottom of Fig. 2 labelled "normal traffic channel". The fourth is divided into two subslots and shown in Fig. 3.

Fig. 3 shows the structure of a control channel slot, which is be one of subslots 111 to 113. The control channel subslot has the same length as one traffic slot. Within a control channel slot there are two random access control channel subslots, each being shown at the bottom of Fig. 3.

As shown at the left of Fig. 2, the SACCH's are provided over four slots 115 to 118. A four millisecond transmitter training time 120 is provided at the start of the SACCH frame prior to the first SACCH slot. This 4 millisecond slot is the common linearization channel provided in accordance with the invention.

Other physical channels are divided into multiframes as shown in Fig. 2, with SACCH frames and CLCH timeslots, but these other channels comprise traffic slots as shown in Fig. 2 in place of control slots of the type shown in Fig. 3.

The benefit of having a CLCH is that transmitter linear training overhead is removed from all timeslots. The 4 millisecond transmit training time now appears only once per

multiframe (approximately once per second). All timeslots now require only ramp up/down tail and synchronisation overheads, with the exception of the first transmission on a traffic channel (described below).

5 The operation using the CLCH is as follows. When a radio is powered up by a user, the first operation is to register on the system. Prior to making any transmissions, the radio unit first synchronises on the base transmissions, and records system parameters e.g. channel frequencies,
10 including CLCH details. The radio then waits until the system CLCH appears and trains its linear transmitter during the 4 millisecond CLCH period. At this point the radio is now ready to communicate.

 The first transmission on a traffic channel on another
15 frequency is shown in Fig. 4. In this case, a 4 millisecond training time is provided (130) to accommodate for any retraining required due to a channel frequency change. Without this training time, a unit that requests a traffic channel and is granted a traffic channel on another frequency
20 would have to wait until the next CLCH timeslot on that frequency before being able to train and transmit. This could introduce a delay of 1 second or more in transmission, which is an undesirable delay.

 The transmitter has means for monitoring the critical
25 parameters affecting its linear performance such as battery voltage, temperature, VSWR, transmit power etc. These means are described in US patent application No. 9204497.3. Once linear, the transmitter only has to relinearize when operation conditions have changed to such an extent that they
30 affect critical parameter values significantly. This is a relatively slow process and generally no significant change occurs over average periods of 20 - 30 seconds. Therefore, the requirement for a transmitter to retrain is typically in the order of once per minute and thus the impact of
35 implementing CLCH operation on battery life is minimal.

 For example a radio transmitter in idle mode will monitor its critical parameters as appropriate and if significant changes in operating conditions have occurred, the radio retrains during the next CLCH. A transmitter in

active mode makes its own decision to retrain at the next CLCH during a call without any pressing of the PTT (push-to-talk) or any receipt of a command from the base station and without break in transmission.

- 5 If a unit is to transmit at substantially below full power (as determined by the signal strength of the outbound signalling), it can decide to forgo training altogether.

- 10 In order to avoid interference with adjacent systems, a mechanism is provided by which the microprocessor 20 of the base station detects regular interference indicative of an adjacent system having regular CLCH timeslots and in response to this detection, the microprocessor 20 adjusts its master clock timing forwards or backwards so as to reduce the shorter interval between its CLCH slots and the adjacent
- 15 system CHLC slots, until these slots are coincident. Ultimately all systems across a continuous geographic area will synchronize to each other.

- 20 In summary, the invention allows the transmitter to be always available for operation, once registered on the system, minimising call set up times. In addition, the removal of access overheads from both slot and subslot increases signalling capacity significantly. Typically a gross signalling capacity of greater than 44 bits per subslot on the RACH can be achieved with prior art methods (i.e.
- 25 subslot duration of 7 milliseconds with 4 milliseconds of linear training). With the CLCH approach an RACH can now support signalling of 162 bits (gross).

Claims

1. A radio system comprising:

5 a base station (6) and a plurality of remote radio units (5) for communicating over time slots of a time divided radio channel,

the base station having means (20', 12') for
10 transmitting a synchronization signal for defining the timing of the time slots, and

each of the remote units having a power amplifier (12) with linearization means (10, 13, 15, 16),
15

characterized in that the channel comprises predetermined linearization time slots (120) for transmission of training signals, interspersed between other time slots and
20

each remote radio unit comprises means (20) for generating a training signal during a linearization time slot and linearizing its power amplifier (12) during that time slot in advance of and independent of transmission of signals
25 during one of said other time slots.

2. A system according to claim 1, for communicating over a plurality of time divided channels of different frequencies, wherein each channel comprises predetermined linearization
30 time slots for transmission of training signals, interspersed between other time slots (110-113).

3. A system according to claim 2, wherein each of the remote units comprises means for receiving a command on a
35 first channel allowing the unit to transmit on a second channel and means for generating a training signal and linearizing its power amplifier (12) at the start of transmission on a first selected timeslot on the second

channel and no training signal upon transmission on at least predetermined subsequent timeslots on that channel.

4. A system according to claim 2 or 3, wherein each of the
5 remote units comprises means for receiving a command on a first channel causing it to tune to a second channel for receiving signals on the second channel, and means for disregarding a first portion of a first selected timeslot on the second channel.
- 10
5. A system according to claim 2, 3 or 4, wherein each of the remote units comprises means for receiving a command on a first channel causing it to tune to a second channel, for receiving signals on the second channel, and means for
15 automatically generating a training signal on the next available linearization time slot on the second channel and linearizing its power amplifier during that time slot.
6. A system according to any one of the preceding claims,
20 further comprising means associated with the base station for adjusting the timing of transmission of synchronization signals with respect to synchronization signals transmitted by other base stations.
- 25 7. A radio unit for operation in a radio system having a time divided radio channel, the radio unit comprising:
a receiver (24) for receiving synchronization signals for synchronizing to the channel and
a transmitter having a power amplifier (12) with
30 linearization means (10, 13, 15, 16), means (20) for generating a linearization training signal, means for inputting a command to transmit other signals and means for transmitting those other signals on input of such a command, characterized in that
35 the channel comprises predetermined linearization time slots (120) for transmission of training signals, interspersed between other time slots for transmission of said other signals and

the radio unit (5) comprises means (20) for generating a training signal during a linearization time slot and linearizing the power amplifier during that time slot, independent of inputting of an instruction to transmit said
5 other signals.

8. A radio unit according to claim 7, comprising means (24) for receiving a command on a first channel allowing the unit to transmit on a second channel and means (20) for generating
10 a training signal and linearizing its power amplifier at the start of transmission on a first selected timeslot on the second channel and no training signal upon transmission on at least predetermined subsequent timeslots on that channel.

15 9. A radio unit according to claim 7 or 8, comprising means (24, 20) for receiving a command on a first channel causing it to tune to a second channel, for receiving signals on the second channel, and means (20) for disregarding a first
- portion of a first selected timeslot on the second channel.

20 10. A radio unit according to claim 7, 8 or 9, comprising means (24) for receiving a command on a first channel causing it to tune to a second channel, for receiving signals on the second channel, and means for automatically generating a
25 training signal on the next available linearization time slot on the second channel and linearizing its power amplifier during that time slot.

30 11. A radio unit according to any one of claims 7 to 10, comprising operating condition monitoring means for monitoring the operating conditions of the unit and means for again generating a training signal during a linearization time slot and linearizing the power amplifier during that time slot in response only to said operating condition
35 monitoring means.

12. A radio unit according to any one of claims 7 to 11 further comprising switchable isolation means for selectively

reducing r.f. transmission during generation of the linearization training signal.

13. A radio unit for operation in a radio system having a
5 time divided radio channel having predetermined training time slots (120) for transmission of training sequences interspersed between traffic time slots, the radio unit comprising:

10 a receiver (24) for receiving synchronization signals for synchronizing to the channel and

means (20) for causing said receiver to receive signals on said radio channel during selected traffic time slots and to disregard signals on said radio channel during said predetermined training time slots.

1/2

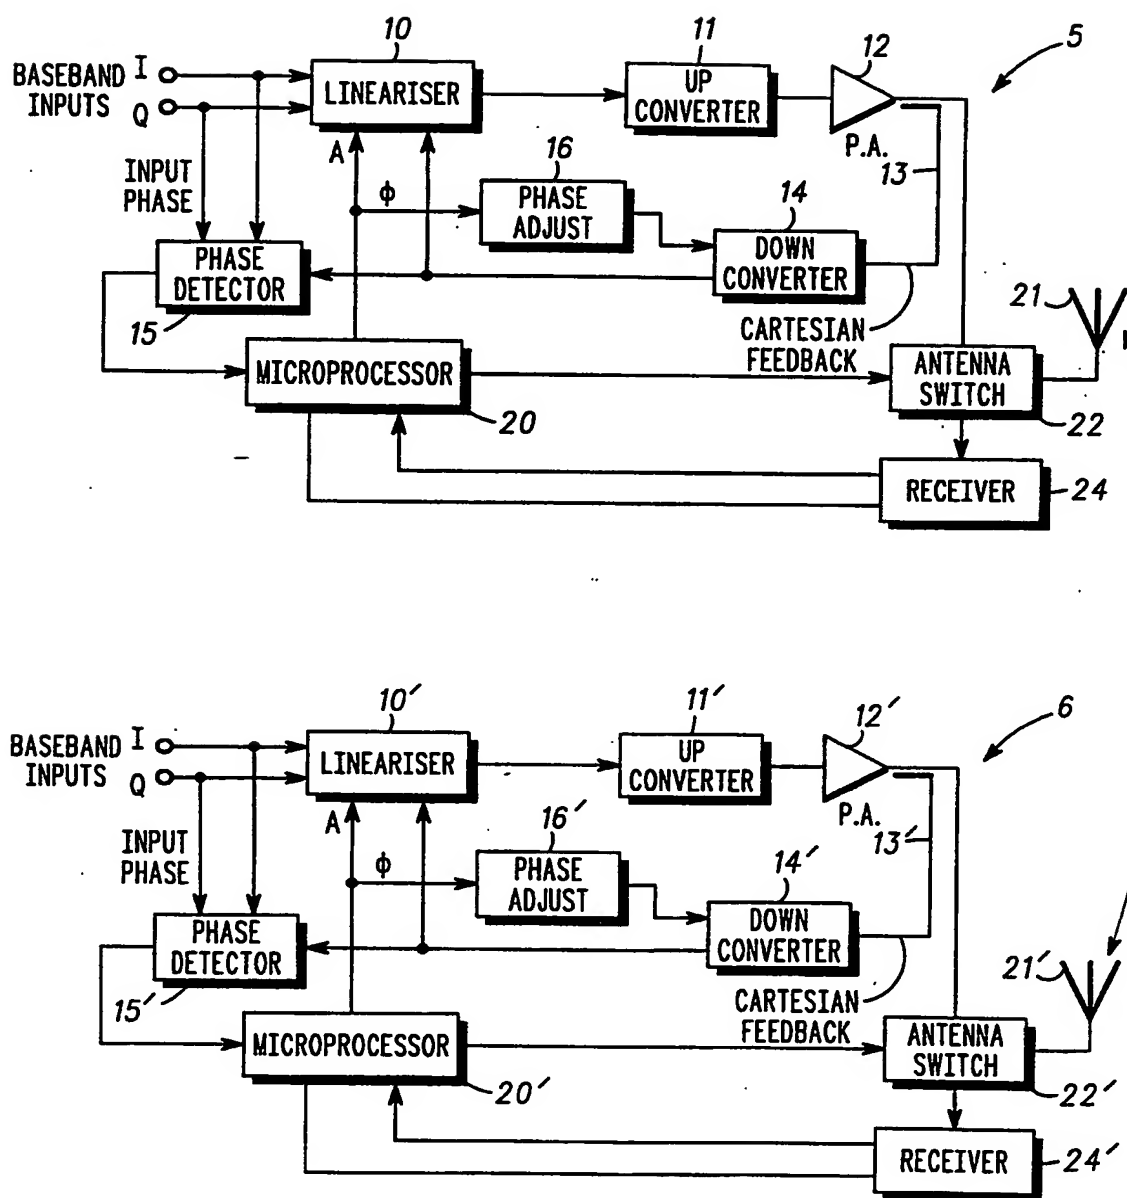


FIG. 1

SUBSTITUTE SHEET

2 / 2

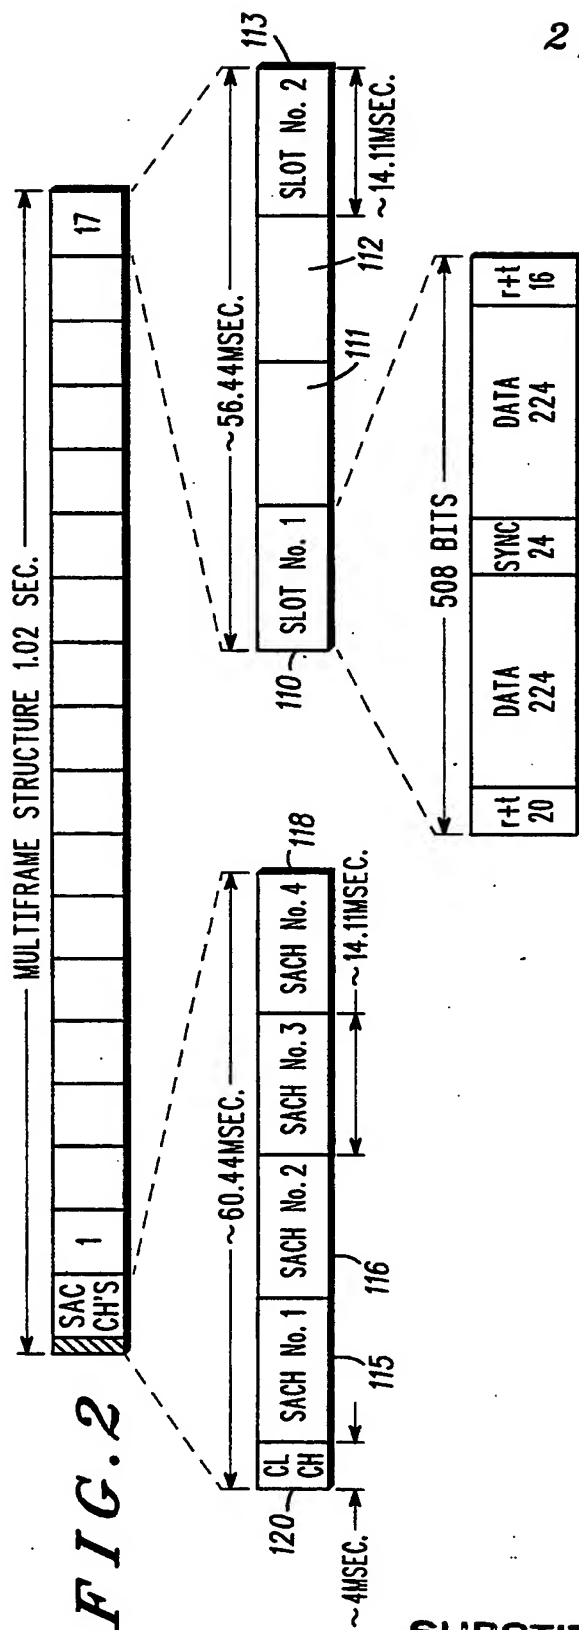


FIG. 3


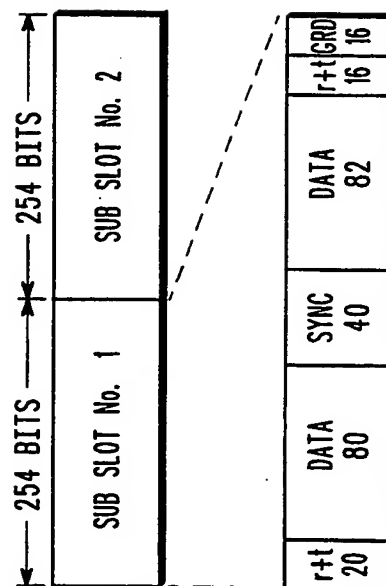


FIG. 4

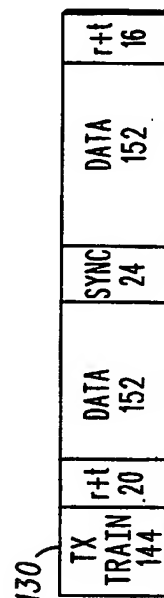

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 93/02743

A. CLASSIFICATION OF SUBJECT MATTER

IPC 5 H04B7/26 H04L27/36 H03F1/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 H04B H04L H03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US,A,5 066 923 (GAILUS ET AL.) 19 November 1991 cited in the application see abstract see column 4, line 53 - column 6, line 2 see figures 1,3-6</p> <p style="text-align: center;">--- - -/--</p>	1,7,13

X Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T"** later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X"** document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y"** document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&"** document member of the same patent family

Date of the actual completion of the international search

11 January 1994

Date of mailing of the international search report

28. 01. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer _____

Lydon, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 93/02743

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PROCEEDINGS OF 41st IEEE VEHICULAR TECHNOLOGY CONFERENCE 19 - 22 May 1991, St. Louis, Missouri (US) NEW YORK (US) pages 439-444, M. JOHANSSON & T. MATTSSON: "TRANSMITTER LINEARIZATION USING CARTESIAN FEEDBACK FOR LINEAR TDMA MODULATION" see page 439, left column, line 1 - right column, line 17 see page 443, left column, line 1 - line 9 see figure 1 -----	1,7,13
A	WO,A,92 08297 (MOTOROLA) 14 May 1992 see abstract see page 7, line 4 - page 8, line 3 see figure 1 -----	1,7,13

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

page 2 of 2

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 93/02743

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5066923	19-11-91	AU-B- 642610	21-10-93
		AU-A- 3525593	13-05-93
		AU-B- 636807	06-05-93
		AU-A- 8903391	26-05-92
		CN-A- 1061123	13-05-92
		EP-A- 0507926	14-10-92
		JP-T- 5504454	08-07-93
		WO-A- 9208280	14-05-92

WO-A-9208297	14-05-92	CA-A- 2069476	25-04-92
		FR-A- 2669165	15-05-92
		GB-A- 2254973	21-10-92
		JP-T- 5503408	03-06-93

Form PCT/ISA/210 (patent family annex) (July 1992)

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)